

CERES V 1280 SERIES

- Uncooled microbolometer camera for high-resolution thermal imaging
- 1280x1024 pixels
- 12 μm pitch
- GigE or CameraLink
- NETD <60 mK



COMPACT, HIGH-RESOLUTION THERMAL CAMERA

The Ceres V 1280 series is based upon the Dione 1280 OEM thermal imaging core with 1280x480 pixels and 12 μm pixel pitch. The camera offers superior thermal imaging capabilities thanks to the state-of-the-art microbolometer detector and on-board image processing.

The Ceres V 1280 camera outputs full frame images at 60 Hz via either a CameraLink or GigE Vision interface - all GenICam compliant.


The compact size, excellent image quality and GenICam compliant interfacing allow for easy integration in demanding industrial, scientific and security thermal imaging applications. The camera comes either in a no-lens configuration (camera only with M34x0.5 and M45x0.75 optical mount), or optionally with five different HFOV (Horizontal Field-Of-View) options: 12, 16, 25, 48 or 71 degrees.

DESIGNED FOR USE IN


- Industrial Machine Vision
- Medical
- Scientific & Advanced Research
- Safety & Security

ADVANTAGES


- Compact and high-resolution
- Superior on-board image processing performance (optimized image quality)
- GenICam compliant
- Uncooled operation
- Flexible optical mount and lens options

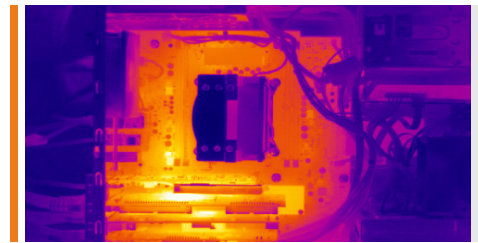

PCB Inspection

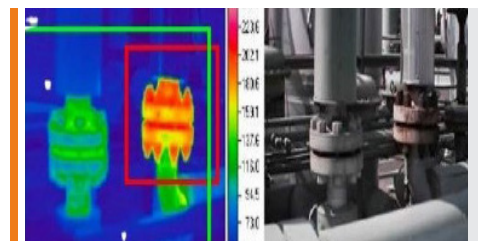

Thermal imaging

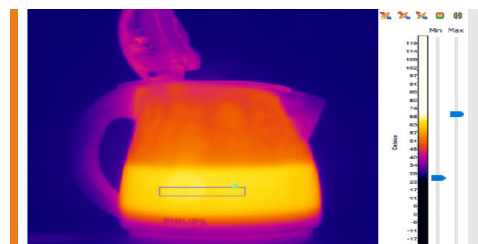

Thermography

SPECIFICATIONS

Camera Specifications	Ceres V 1280 GigE	Ceres V 1280 CL
Mechanical specifications		
Camera dimensions (width x height x length) [mm] (approx.)	65 x 68 x 84	65 x 68 x 81
Optical interface	M34x0.5 & M45x0.75	M34x0.5 & M45x0.75
Camera weight [gr]	583	534
Connector GigE	RJ45	NA
Connector CameraLink	NA	SDR-26
Connector power	Unified Connector (Lemo 1B)	
Connector trigger	Unified connector (Lemo 1B)	
Connector I/O	Unified Connector (Lemo 1B)	
Environmental & power specifications		
Operating temperature range (housing temperature) [°C]	From -40 to +70	
Storage temperature [°C]	From -40 to +85	
Power consumption [W]	4	3.5
Power supply voltage	DC 12 V	
Shock	40 g, 11 ms, MIL-STD810G	
Vibration	5 g (20 to 2000 Hz), MIL-STD810G	
IP rating	IP40	
Regulatory compliance	RoHS	
Electro-optical specifications		
Image format [pixels]	1280x1024	
Pixel pitch [µm]	12	
Detector type	Microbolometer	
Integration type	Rolling shutter	
Active area and diagonal [mm]	15.36 x 12.29 (diagonal 19.67)	
Detector NETD [Noise Equivalent Temperature Difference] [mK]	<60 (at 30Hz, 300K, F/1)	
Spectral range [µm]	8-14	
Pixel operability	>99.5% (excluding 3 peripheral rows and columns)	
Max frame rate [Hz] [full frame]	60	
Integration time range [µs]	20 - 65	
Analog-to-Digital [ADC] [bits]	16	
Command and control	GigE	CL
Digital output format	GigE	CL
Trigger	Unified connector (Lemo 1B)	
Product selector guide		
Part number	XEN-000746	XEN-000747

XDS0033 | Information furnished by Xenics is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are typical values and subject to change without notice. This information supersedes all previously supplied information.



For more information on our products
Please scan the QR code.

www.xenics.com | www.sinfrared.com