



## IMPROVE ACCURACY AND REDUCE COSTS

Specim FX10 camera series is designed for industrial and laboratory use. Specim FX10 cameras work in a line-scan mode in the visible and near-infrared (VNIR) area; Specim FX10 in the 400-1000 nm region, and the color optimized Specim FX10c camera in the 400-770 nm region.


Specim FX10 cameras are best suited for:

- Vegetation & agriculture
- Phenotyping
- Color & density in printing
- Display & light source inspection
- Food quality



## FEATURES

- Spectral range of 400-1000 / 400-770 nm
- High spatial resolution of 1024 pixels
- High image speed of 327 FPS (full range)
- Free wavelength selection from 224 bands within the camera coverage
- Built-in image correction
- Unified spectral calibration between units
- GigE or CameraLink standard interfaces
- Easy mounting to industrial environment
- Certificates: CE, RoHS

## SPECTRAL RESPONSE

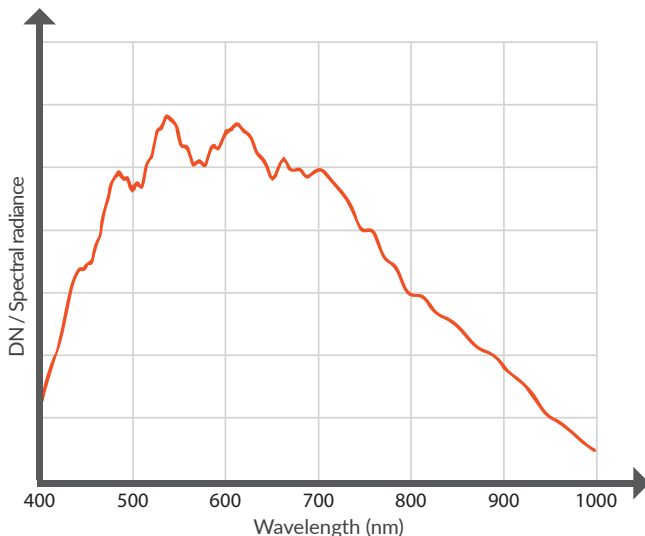

## DIMENSIONS

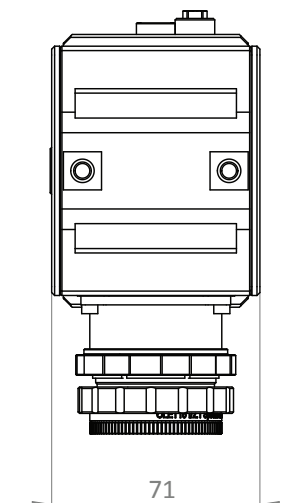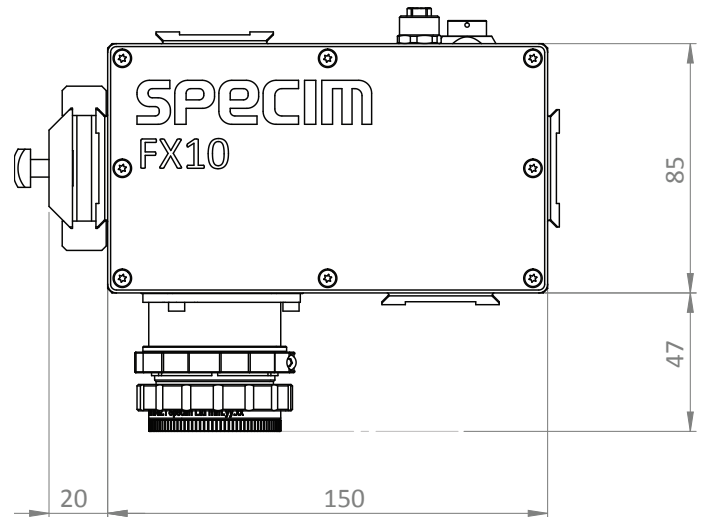

<b>Spectral Range</b>	400-1000 / 400-770 (c-version)	
<b>Spectral resolution (FWHM)</b>	5.5 nm (mean)	
<b>Spectral sampling/pixel</b>	2.7 nm	With default binning
<b>Spectral bands</b>	224 / 140 (c-version)	With default binning
<b>Numerical aperture</b>	1.7	With default lens
<b>Optics magnification</b>	0.80	
<b>Effective pixel size</b>	19.9x9.97 µm	At fore lens image plane
<b>Effective slit width</b>	42 µm	At fore lens image plane
<b>Effective slit length</b>	10.2 mm	At fore lens image plane
<b>SNR @ max. signal</b>	420 : 1	
<b>Spatial samples</b>	1024	
<b>Bit depth</b>	12	
<b>Maximum frame rate</b>	327 FPS full range / 514 FPS full range (c-version)	
<b>Binning</b>	2,4,8 spectral and spatial	Default: 2 spectral x 1 spatial
<b>ROI</b>	Freely selectable multiple bands of interest	Minimum height of ROI is two 1-binned rows. Maximum frame rate is determined by the total number of rows included in the mMROI's
<b>Pixel operability</b>	99.993%	
<b>Image corrections</b>	Non uniformity correction Bad pixel replacement Automatic Image Enhancement (AIE)	One point NUC  AIE: Unified spectral calibration + corrected smile and keystone aberrations
<b>Sensor material</b>	CMOS	
<b>Sensor cooling</b>	Passive	
<b>Full well capacity</b>	90 ke-	
<b>Read-out modes</b>	IWR / ITR	
<b>Optics temperature</b>	Passive	
<b>Lens mount</b>	Custom mount	
<b>Fore lens FOV options</b>	12 deg 24 deg 38 deg (default) 47 deg 51 deg 83 deg	Only the default lens is specifically designed for FX10. With other lens options, optical parameters may vary.
<b>Camera digital data output/control interface</b>	GigE Vision, CameraLink	
<b>Camera control protocols</b>	GenICam, ASCII	
<b>Power input</b>	12 V DC (+-10%)	
<b>Power consumption</b>	Max 4 W	
<b>Connectors</b>	Industrial Ethernet OR CameraLink 26-pin, 0.5" MDR	
<b>IP</b>	IP52	
<b>Dimensions (L x W x H)</b>	150 x 85 x 71 mm	Mounting surface option on three sides. Mounting kit adds 24 mm distance on mounting side.
<b>Weight</b>	1.3 kg	
<b>Storage temperature</b>	-20 ... +50°C (non-condensing)	
<b>Operating temperature</b>	+5 ... +40°C (non-condensing)	
<b>Relative humidity</b>	5% – 95% (non-condensing)	

Specim, Spectral Imaging Ltd. ▪ A Konica Minolta Company ▪ POB 110, FI-90591 Oulu Finland ▪ Elekroniikkatie 13, Oulu Finland  
Tel +358 (0) 10 4244 400 ▪ VAT Identification number FI10079234 ▪ info@specim.com ▪ www.specim.com

Information in this document is subject to change without notice. Specim, Spectral Imaging Ltd. reserves the right to change or improve its products and specifications and to make changes in content without obligation to notify any person or organization of such changes or improvements.