

# Ceres T 640 Series

## LWIR thermographic camera

- ▶ Compact and uncooled LWIR thermographic camera
- ▶ Microbolometer detector with 640x480 resolution and 12 μm pixel pitch



## Compact, high-performance thermographic camera

The Ceres T 640 series is based upon the Dione 640 OEM thermal imaging core with 640x480 pixels and 12 μm pixel pitch. The camera offers superior on-board thermographic performance (accuracy, stability) in the temperature range between up to 400°C.

The Ceres T 640 camera outputs full frame images at 60 Hz via either a CameraLink or GigE Vision interface.





The compact size, excellent thermographic stability and accuracy, and GenICam compliant interfacing allow for easy integration in demanding industrial thermography applications. The camera comes with four different HFOV (Horizontal Field-Of-View) options: 8, 12, 24 or 50 degrees.

### | Designed for use in

- Process Monitoring
- Medical
- Scientific & Advanced Research

### | Advantages

- Compact size
- Superior on-board thermographic performance (stability, accuracy)
- Temperature measurements up to 400 degree Celcius
- Frame rate up to 60 Hz
- Low latency synchronization

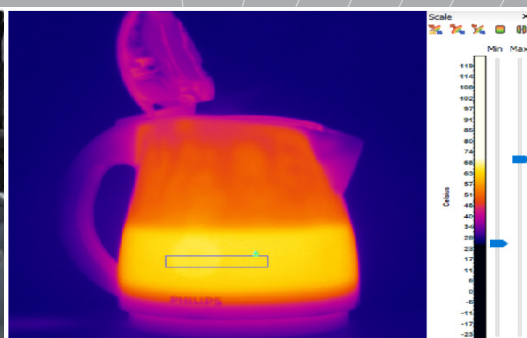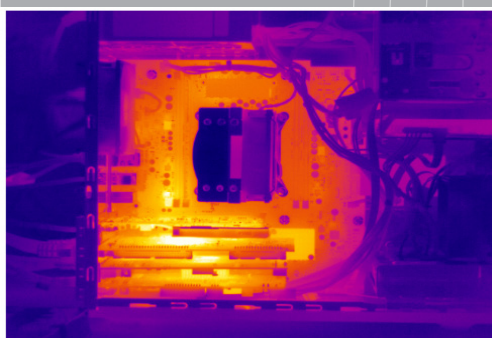

PCB Inspection

Thermal imaging

Thermography

## ► Camera Specifications

Camera Specifications	Ceres T 640 CL	Ceres T 640 GigE
<b>Mechanical specifications</b>		
Approximate Dimensions [mm] - excluding lens	45 x 45 x 67	45 x 45 x 75
Weight [gr] - excluding lens	242 [Ceres T 640 8 CL], 299 [Ceres T 640 12 CL], 224 [Ceres T 640 24 CL], 371 [Ceres T 640 50 CL]	249 [Ceres T 640 8 GigE], 306 [Ceres T 640 12 GigE], 231 [Ceres T 640 24 GigE], 378 [Ceres T 640 50 GigE]
Optical interface	M24 x 0.5 [Ceres T 640 24, Ceres T 640 50], M34 x 0.5 [Ceres T 640 8, Ceres T 640 12]	
Connector I/O	Unified connector [Lemo 1B]	
<b>Environmental &amp; power specifications</b>		
Ambient operating temperature range [°C]	From -40 to +70	
Storage temperature [°C]	From -40 to +85	
Power consumption [W]	3.5	4
Power supply voltage	DC 12 V	
Shock	40 g, 11 ms, MIL-STD810G	
Vibration	5 g [20 to 2000 Hz], MIL-STD810G	
IP rating	IP40	
Regulatory compliance	RoHS	
<b>Electro-optical specifications</b>		
Image format [pixels]	640 x 480	
Pixel pitch [µm]	12	
Detector type	Microbolometer	
Integration type	Rolling shutter	
Active area and diagonal [mm]	7.68 x 5.76 [diagonal 9.6]	
Detector NETD [Noise Equivalent Temperature Difference] [mK]	<60 [at 30 Hz, 300 K, F/1]	
Spectral range [nm]	8 - 14	
Pixel operability	>99.5% [excluding 3 peripheral rows and columns]	
Max frame rate [Hz] [full frame]	60	
Integration time range [µs]	20 - 65 [recommended]	
Min region size [pixels]	80 x 80	
Analog-to-Digital [ADC] [bits]	16	
Command and control	CL	GigE
Digital output format	CL	GigE
Trigger	Unified connector [Lemo 1B]	
<b>Thermography</b>		
Calibration pack 1 [°C]	From -20 to 120	
Calibration pack 2 [°C]	From 50 to 400	
Temperature measurement accuracy	Either +/- 2 °C or +/- 2%, whichever is greatest	
Operating temperature range [housing temperature] [°C]	10 - 35	
<b>Product selector guide</b>		
Part number	XEN-000728 [Ceres T 640 8 CL] XEN-000727 [Ceres T 640 12 CL] XEN-000726 [Ceres T 640 24 CL] XEN-000682 [Ceres T 640 50 CL]	XEN-000725 [Ceres T 640 8 GigE] XEN-000724 [Ceres T 640 12 GigE] XEN-000723 [Ceres T 640 24 GigE] XEN-000681 [Ceres T 640 50 GigE]

XDS-027.01. Information furnished by Xenics is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are typical values and subject to change without notice. This information supersedes all previously supplied information.



For more information on our products please scan the QR code.

[www.xenics.com](http://www.xenics.com) | [www.sinfrared.com](http://www.sinfrared.com)

**Xenics**  
Infrared Solutions

ISO 9001:2015 certified